

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

Studies on Direct Injection Diesel Engine with Ceramic Coated Low Heat Rejection Combustion Chamber with Tyre Oil

M.Deepika Patali¹, D.Shravya², K. Sai Srinivas³, M.V.S. Murali Krishna⁴

¹Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology,
Hyderabad, Andhra Pradesh, India
mailpaatali@gmail.com

²Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology,
Hyderabad, Andhra Pradesh, India
shravyadorna@gmail.com

³Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology,
Hyderabad, Andhra Pradesh, India
keshettysaisrinivas@gmail.com

⁴Professor, Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology,
Hyderabad, Andhra Pradesh, India
mvsmk@cbit.ac.in

Nomenclature

ρ_a density of air, kg/m³

ρ_d density of fuel, gm/cc

η_d efficiency of dynamometer, 0.85

a area of the orifice flow meter, m²

BP brake power of the engine, kW

C number of carbon atoms in fuel composition

C_d coefficient of discharge, 0.65

C_p specific heat of water in kJ/kg K

D bore of the cylinder, 80 mm

D diameter of the orifice flow meter, 20 mm

DF diesel fuel

H number of hydrogen atoms in fuel

HSU Hartridge smoke unit

I ammeter reading, ampere

H difference of water level in U-tube water manometer in cm of water column

IT injection timing, degree bTDC

K number of cylinders, 01

L stroke of the engine, 110 mm

m_a mass of air inducted in engine, kg/h

m_f mass of fuel, kg/h

m_w mass flow rate of coolant (water), kg/s

n power cycles per minute, N/2,

N speed of the engine, 1500 rpm

P_a atmosphere pressure in mm of mercury

R gas constant for air, 287 J/kg K

T time taken for collecting 10 cc of fuel, second

T_a room temperature, degree centigrade

T_i inlet temperature of water, degree centigrade

T_o outlet temperature of water, degree centigrade

V voltmeter reading, volt

V_s stroke volume, m³

ABSTRACT: Disposal of waste rubber products is becoming an environmental challenge in many developing countries due to their non-bio degradability characteristics. Majority of waste rubber products are generated from worn or damaged automotive tyres and industrial conveyor belts. Crude rubber oil, derived by slow pyrolysis of waste rubber products, can be used as fuel in diesel engine, as its properties are comparable to diesel fuel. However, the disadvantages associated with these oils of high viscosity and low volatility call for engine with low heat rejection (LHR) combustion chamber, with significant characteristics of higher operating temperature, maximum heat release, higher brake thermal efficiency and ability to handle the lower calorific value fuel. Investigations were carried out to evaluate the performance of diesel engine with LHR combustion chamber consisting of ceramic coated cylinder head (partially stabilized zirconium of thickness 500 microns was coated on inside portion of cylinder head) with different operating conditions (normal temperature and preheated temperature) of tyre oil with varied injector opening pressure. Performance parameters [brake thermal efficiency, exhaust gas temperature, sound levels, coolant load and volumetric efficiency] were determined at various values of brake mean effective pressure (BMEP) of the engine and compared with conventional engine with diesel operation at similar operating conditions. Tyre oil showed deteriorated performance with conventional engine (CE), while LHR combustion chamber improved the performance in comparison with pure diesel operation at similar operating conditions. Engine with LHR combustion chamber with tyre oil operation increased by 5%, at full load operation—brake specific energy consumption was compatible, decreased exhaust gas temperature by 3%, decreased coolant load by 4%, decreased sound levels by 6%, decreased volumetric efficiency by 3% and decreased smoke levels by 10% in comparison with pure diesel operation at similar operating conditions.

Keywords: Rubber oil; LHR combustion chamber; Fuel performance and smoke levels.

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

1. INTRODUCTION

The resources of petroleum as fuel are dwindling day by day and increasing demand of fuels, as well as increasingly stringent regulations, pose a challenge to science and technology [1].

Alcohols (ethanol and methanol) are important substitutes for diesel fuel in diesel engine. Alcohols have good volatility and low C/H ratio. However, they have low cetane number. Hence engine modification is necessary for use them as fuel in diesel engines. That too, most of the alcohol produced is diverted for Petro-chemical industries in India.

Vegetable oils which are renewable in nature have properties compatible to diesel fuel. Rudolph Diesel, the inventor of the diesel engine that bears his name, experimented with fuels ranging from powdered coal to peanut oil [2]. Several researchers experimented the use of vegetable oils as fuel on conventional engines (CE) and reported that the performance was poor, citing the problems of high viscosity, low volatility and their polyunsaturated character. Not only that, the common problems of crude vegetable oils in diesel engines are formation of carbon deposits, oil ring sticking, thickening and gelling of lubricating oil as a result of contamination by the vegetable oils [3–5].

Experiments were conducted on preheated vegetable oils [temperature at which viscosity of the vegetable oils were matched to that of diesel fuel] and it was reported that performance improved marginally with preheated vegetable oils [6–9]. Increased injector opening pressures may also result in efficient combustion in compression ignition engine [3–5].

Disposal of rubber products, generated from worn or damaged automotive tyres and industrial conveyor belts is becoming an environmental challenge in many developing countries due to their non-bio degradability characteristics. Tyre oil was used in diesel engine as blended fuel with diesel [10–12]. Results showed that the brake thermal efficiency of the engine fueled with blends increased with an increase in blend concentration. Exhaust emissions of nitrogen oxides, hydro carbon levels and carbon mono oxide levels and smoke were found to be higher at higher loads due to the high aromatic content and longer ignition delay. Peak pressure increased and ignition delay were longer than diesel fuel. However, It was concluded that it is possible to use tyre pyrolysis oil in diesel engines as an alternate fuel in the future.

However, the disadvantages associated with use of tyre oil of high viscosity and low volatility call for engine with LHR combustion chamber. The concept of LHR combustion chamber is to reduce coolant losses by providing thermal resistance in the path of heat flow to the coolant, there by gaining thermal efficiency. Several methods adopted for achieving LHR to the coolant are i) ceramic coated combustion chambers (LHR–1 combustion chamber) by providing low thermal conductivity material on cylinder head, crown surface of piston and inner portion of liner and ii) air gap insulated combustion chambers (LHR–2 combustion chamber), where air gap is created in the piston

and other components with low-thermal conductivity materials like superni, cast iron and mild steel.

Investigations were carried out by various researchers on engines with low degree LHR combustion chambers- (ceramic coated engines) with pure diesel operation [13–15]. It was reported from their investigations that brake specific fuel consumption (BSFC) improved in the range 5-9% and pollution levels decreased with ceramic coated combustion chamber.

Sound levels determine the phenomena of combustion in engine whether the performance was improving or deteriorating. Studies were made on sound levels with low grade LHR combustion chamber with vegetable oils [3–5]. It was reported from the studies, that performance deteriorated with vegetable oil operation on conventional engine leading to produce high sound levels and improved with LHR combustion chamber causing low sound levels.

Little literature was available on studies of tyre oil with ceramic coated combustion chamber. Hence it was attempted here to evaluate the performance of the engine with tyre oil at different injector opening pressure and compared with engine with conventional engine. Comparative studies were also made with diesel operation at similar operating conditions.

2. MATERIAL AND METHOD

2.1 Manufacturing of Tyre Oil

Crude rubber oil is derived by slow pyrolysis of waste rubber products, where rubber containing material is heated in an oxygen free reactor at temperatures in between 300–350° C and resulting gasses are condensed into liquid crude rubber oil with excellent and consistent fuel properties with a high calorific value, thus maybe used directly as fuel or blended with other fuels [11]. Table–1 shows physical–chemical properties of test fuels.

Table1: Physical-Chemical Properties of Test Fuels


Property	Units	Diesel	Crude Tyre Oil (CTO)
Cetane Number		55	45
Density	gm/cc	0.84	0.92
Bulk modulus @ 20Mpa	Mpa	1475	1850
Kinematic viscosity @ 40°C	cSt	2.25	9.0
Total Sulfur	ppm	498	9106
Low calorific value	kJ/kg	42 000	40000
Flash point (Open cup)	°C	66	94
Colour	--	Light yellow	Light orange
Preheated temperature	°C	--	125

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

2.2 Description of the Experimental Set-Up

Schematic diagram of experimental set-up used for the investigations on compression ignition diesel engine and LHR combustion chamber with tyre oil is shown in Figure 1. The specifications of the experimental engine are shown in Table-2. The combustion chamber consisted of a direct injection type with no special arrangement for swirling motion of air. The engine was connected to an electric dynamometer for measuring its brake power with output signals of current and voltage. The accuracy obtained with loading of dynamometer is $\pm 1\%$. The fuel consumption was registered with the aid of fuel measuring device (Burette and stop watch) and then mass flow rate of fuel was determined by knowing the density of the fuel. Density of fuel was determined by hydrometer. Percentage error obtained with measurement of fuel flow rate assuming laminar film in the burette was within the limit. The accuracy of determination of brake thermal efficiency obtained is $\pm 2\%$. The speed of the engine was measured with digital tachometer with accuracy $\pm 1\%$. Air-consumption of the engine was measured by an air-box method (Air-box was provided with an orifice flow meter and U-tube water manometer). Air-box was provided with damper to damp out oscillations. The naturally aspirated engine was provided with water-cooling system in which inlet temperature of water was maintained at 80°C by adjusting the water flow rate. Engine oil was provided with a pressure feed system.

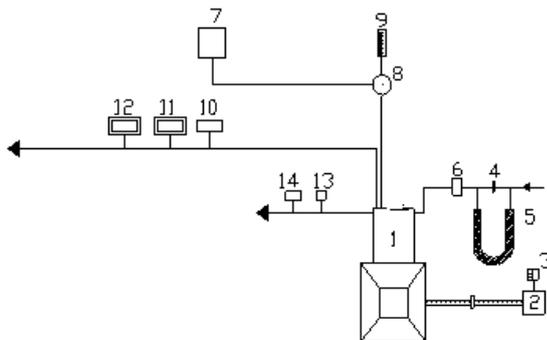

1.Engine, 2.Electical Dynamo meter, 3.Load Box, 4.Orifice meter, 5.U-tube water manometer, 6.Air box, 7.Fuel tank, 8, Three-way valve, 9.Burette, 10. Exhaust gas temperature indicator, 11.AVL Smoke meter, 12.Netel Chromatograph NOx Analyzer, 13.Outlet jacket water temperature indicator, 14. Outlet-jacket water flow meter

Figure1: Schematic diagram of experimental set-up

No temperature control was incorporated, for measuring the lube oil temperature. Injector opening pressure was changed using nozzle testing device from 190 bar to 270 bar (in steps of 40 bar) using nozzle testing device. The maximum injector opening pressure was restricted to 270 bar due to practical difficulties involved. Exhaust gas temperature, coolant outlet temperature was measured with thermocouples made of iron and iron-constantan connected to analogue temperature indicators. The accuracy with these temperature indicators are $\pm 1\%$. Partially stabilized zirconium of

thickness 0.5 mm was coated on inside portion of cylinder head by plasma spray technique.

Table.2: Specifications of the Test Engine

Description	Specification
Engine make and model	Kirloskar (India) AV1
Maximum power output at a speed of 1500 rpm	3.68 kW
Number of cylinders \times cylinder position \times stroke	One \times Vertical position \times four-stroke
Bore \times stroke	80 mm \times 110 mm
Method of cooling	Water cooled
Rated speed (constant)	1500 rpm
Fuel injection system	In-line and direct injection
Compression ratio	16:1
BMEP @ 1500 rpm	5.31 bar
Manufacturer's recommended injection timing and pressure	27°bTDC \times 190 bar
Dynamometer	Electrical dynamometer
Number of holes of injector and size	Three \times 0.25 mm
Type of combustion chamber	Direct injection type
Fuel injection nozzle	Make: MICO-BOSCH No- 0431-202-120/HB
Fuel injection pump	Make: BOSCH: NO-8085587/1

2.3 Operating conditions

Various test fuels used in experimentation were pure diesel and tyre oil. Different operating conditions of the biodiesel were normal temperature and preheated temperature. Different injector opening injector opening pressures attempted in this experimentation were 190 bar, 230 bar and 270 bar.

2.4 Definitions of used values:

$$m_f = \frac{10 \times \rho_d \times 3600}{t \times 1000} \times V \times I \quad (1)$$

$$BP = \frac{\eta_d \times 1000}{\eta_d \times 1000} \quad (2)$$

$$BTE = \frac{BP \times 3600}{m_f \times CV} \quad (3)$$

$$BSEC = \frac{1}{BTE} \quad (4)$$

$$BP = \frac{BMEP \times 10^5 \times L \times A \times n \times k}{60000} \quad (5)$$

$$CL = m_w \times c_p \times (T_o - T_i) \quad (7)$$

$$m_a = C_d \times a \times \sqrt{2 \times 10 \times g \times h \times \rho_a \times 3600} \quad (6)$$

$$a = \frac{\pi \times d^2}{4} \quad (7)$$

$$\eta_v = \frac{m_a \times 2}{60 \times \rho_a \times N \times V_s} \quad (8)$$

$$\rho_a = \frac{P_a \times 10^5}{750 \times R \times T_a} \quad (9)$$

3. RESULTS AND DISCUSSION

3.1 Performance Parameters

Data of pure diesel was taken from reference [4]. Curves in Fig.2, indicate brake thermal efficiency increased up to 80% of the full load and beyond that load it decreased in conventional engine with test fuels. This was due to increase

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

of fuel conversion up to 80% of full load. Beyond 80% of peak load, air fuel ratios got reduced as oxygen was completely used up. Conventional engine operated with crude tyre oil (CTO) showed deteriorated performance at all loads when compared with the pure diesel operation on conventional engine at 27° bTDC. This was due to higher viscosity and accumulation of carbon on nozzle tip with cotton seed oil. In addition, less air entrainment by the fuel spray suggested that the fuel spray penetration might increase and resulted in more fuel reaching the combustion chamber walls. Furthermore droplet mean diameters (expressed as Sauter mean) were larger for tyre oil leading to reduce the rate of heat release as compared with diesel fuel. This also, contributed the higher ignition (chemical) delay of the tyre oil due to lower cetane number. According to the qualitative image of the combustion under the crude tyre oil operation with CE, the lower BTE was attributed to the relatively retarded and lower heat release rates. Curves from same Figure indicate that LHR version of combustion chamber with tyre oil operation at recommended injection timing showed improvement in the performance for the entire load range compared with conventional engine with pure diesel. High cylinder temperatures helped in improved evaporation and faster combustion of the fuel injected into the combustion chamber. Reduction of ignition delay of the crude tyre oil in the hot environment of the LHR engine improved heat release rates and efficient energy utilization.

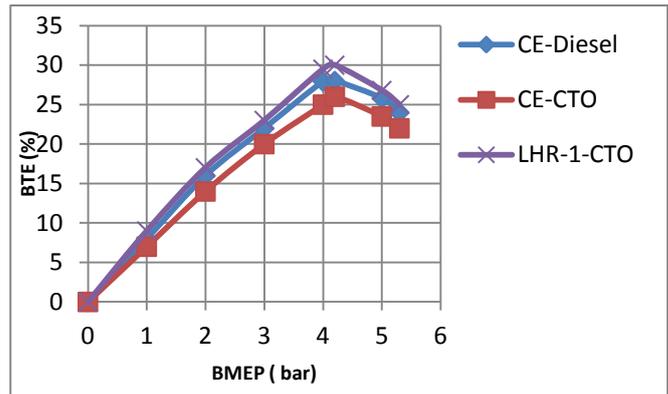


Figure 2: Variation of brake thermal efficiency with brake mean effective pressure (BMEP) with tyre oil operation in conventional engine and engine with LHR-1 combustion chamber at an injection timing of 27° bTDC and injector opening pressure of 190 bar.

Injector opening pressure was varied from 190 bars to 270 bar to improve the spray characteristics and atomization of the tyre oil with conventional engine and engine with LHR-2 combustion chamber.

From Table.3, it is observed that that peak brake thermal efficiency increased with increase in injector opening pressure in both versions of the combustion chamber at different operating conditions of the tyre oil. The improvement in brake thermal efficiency at higher injector opening pressure was due to improved fuel spray characteristics. Preheated tyre oil showed marginally higher BTE than normal tyre oil. This was due to improvement in spray characteristics with improved air fuel ratios.

CE with pure diesel operation showed improved BTE, while engine with LHR-1 combustion chamber showed improved BTE with tyre oil operation. Hence engine with LHR-1 combustion chamber was more suitable for crude tyre oil operation, while CE was more suitable for diesel operation.

Table.3
Data of peak BTE

Test Fuel	Peak BTE (%)											
	Conventional Engine (CE)						Engine with LHR-1 combustion chamber					
	Injector opening pressure (Bar)						Injector opening pressure (Bar)					
	190		230		270		190		230		270	
	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
Diesel	28	--	29	---	30	--	28.5	--	29	--	29.5	--
CTO	26	27	27	28	28	29	30	30.5	30.5	31	31	31.5

Brake specific fuel consumption (BSFC), is not used to compare the two different fuels, because their calorific value, density, chemical and physical parameters are different. Brake specific energy consumption (BSEC) defined as energy consumed by the engine in producing 1 kW brake power.

From Table.4, BSEC at full load operation decreased with increase of injector opening pressure with both versions of the combustion chamber with different operating conditions of tyre oil. This was due to efficient combustion with

improved air fuel ratios giving lower value of brake specific energy consumption. Bulk modulus of the fuel increased with increase of injector opening pressure leading to generate higher peak pressure leading to reduce the value of brake specific energy consumption.

BSEC was lower with preheated tyre oil than normal tyre oil. Bulk modulus and hence compressibility of the fuel also change with preheating. That shows lower energy substitution and effective energy utilization of tyre oil, which could replace 100% diesel fuel.

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

BSEC was higher with tyre oil with conventional engine due to due to higher viscosity, poor volatility and reduction in heating value of tyre oil because of its poor atomization and combustion characteristics.

BSEC with engine with LHR-1 combustion chamber with pure diesel operation was marginally lower when compared with conventional engine. This was due to improved combustion with improved air fuel ratios.

BSEC was lower with conventional engine with diesel operation, while it was lower with engine with LHR-1 combustion chamber with tyre oil. This once again established the fact that engine with LHR-1 combustion chamber more suitable for tyre oil operation.

Table.4: Data of brake specific energy consumption (BSEC) at full load Operation

Test Fuel	Brake Specific Energy Consumption (kW.h) at full load operation											
	Conventional Engine (CE)						Engine with LHR-1 combustion chamber					
	Injector opening pressure (Bar)						Injector opening pressure (Bar)					
	190		230		270		190		230		270	
	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
Diesel	4		3.96		3.92		3.96		3.92		3.88	
CTO	4.3	4.1	4.0	3.96	3.96	3.94	3.92	3.88	3.88	3.86	3.86	3.82

From the Fig.3, it is observed that conventional engine with crude tyre oil operation recorded drastically higher value of EGT at all loads compared with CE with pure diesel operation. Though calorific value (or heat of combustion) of fossil diesel is more than that of crude tyre oil, its density is less in comparison with tyre oil. Therefore lesser the heat is released in the combustion chamber leading to generate lower temperature with diesel operation on conventional engine. Also, there is an advanced combustion of crude tyre oil due to its higher bulk modulus. However its cetane number is less when compared to fossil diesel. Hence there is no effect of bulk modulus on injection timing (advance or retardation) and heat release. Crude tyre oil operation on conventional engine exhausted more amount of heat in comparison with pure diesel operation on CE. Lower heat release rates and retarded heat release associated with high specific energy consumption caused increase in exhaust gas temperature in conventional engine. Ignition delay in the conventional engine with different operating conditions of tyre oil increased the duration of the burning phase.

At recommended injection timing, with tyre oil operation, engine with LHR-1 combustion chamber recorded lower value of exhaust gas temperature when compared with conventional engine. This was due to reduction of ignition delay in the hot environment with the provision of the insulation in the LHR engine, which caused the gases expanded in the cylinder giving higher work output and lower heat rejection. This showed that the performance improved with engine with LHR-1 combustion chamber over CE with tyre oil operation.

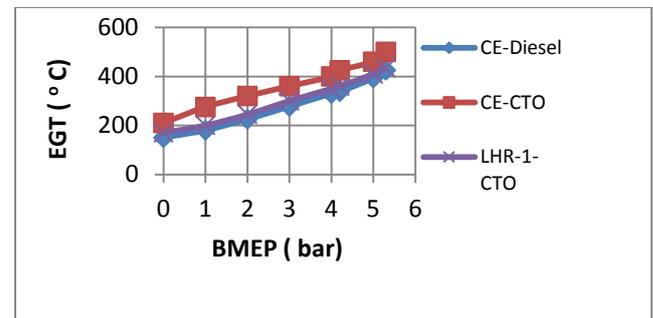


Figure.3 Variation of exhaust gas temperature (EGT) with brake mean effective pressure (BMEP) with tyre oil operation in conventional engine and engine with LHR-1 combustion chamber at an injection timing of 27°bTDC and injector opening pressure of 190 bar.

From Table.5, it is noticed that exhaust gas temperature decreased with increase of injector opening pressure with both versions of the combustion chamber with tyre oil, which confirmed that performance increased with increase of injector opening pressure. This was due to improved spray characteristics of the fuel with improved air fuel ratios.

From Table, it is noticed that the exhaust gas temperatures of preheated tyre oil were higher than that of normal tyre oil in conventional engine, which indicates the increase of diffused combustion due to high rate of evaporation and improved mixing between fuel and air. Therefore, as the fuel temperature increased, the ignition delay decreased and the main combustion phase (that is, diffusion controlled combustion) increased, which in turn raised the temperature of exhaust gases.

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

Table.5: Data of exhaust gas temperature at full load operation

Injection Timing (° bTDC)	Test Fuel	Exhaust Gas Temperature at peak load operation (degree Centigrade)											
		Conventional Engine (CE)						Engine with LHR-1 combustion chamber					
		Injector opening pressure (Bar)						Injector opening pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	425	--	410	---	395	--	450		425		400	
	CTO	500	550	450	500	425	450	435	400	400	370	400	350

It can be observed from Fig.4, that volumetric efficiency decreased with an increase of brake mean effective pressure in both versions of the combustion chamber with tyre oil operation. This was due to increase of gas temperature with the load. At the recommended injection timing, volumetric efficiency in the both versions of the combustion chamber with tyre oil operation decreased at all loads when compared with conventional engine with pure diesel operation. Volumetric efficiency mainly depends on speed of the engine, valve area, valve lift, timing of the opening or closing of valves and residual gas fraction rather than on load variation. Hence with tyre oil operation with conventional engine, volumetric efficiency decreased in comparison with pure diesel operation on conventional engine, as residual gas fraction increased. This was due to increase of deposits with tyre oil operation with conventional engine. This was also due to increase of exhaust gas temperatures with conventional engine with tyre oil operation which in turn increased combustion chamber wall temperature.

The reduction of volumetric efficiency with engine with LHR-1 combustion chamber was due increase of temperature of incoming charge in the hot environment created with the provision of insulation, causing reduction in the density and hence the quantity of air with engine with LHR-1 combustion chamber.

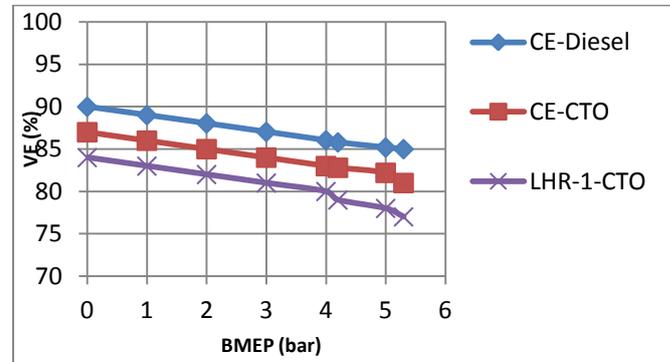


Figure.4. Variation of volumetric efficiency with brake mean effective pressure (BMEP) with tyre oil operation in conventional engine and engine with LHR-1 combustion chamber at an injection timing of 27° bTDC and injector opening pressure of 190 bar.

From Table.6, it is observed that volumetric efficiency increased with increase of injector opening pressure in both versions of the combustion chamber with tyre oil. This was also due to improved fuel spray characteristics and evaporation at higher injector opening pressures leading to marginal increase of volumetric efficiency. This was also due to the reduction of residual fraction of the fuel, with the increase of injector opening pressure. Increase of volumetric efficiency depends on combustion chamber wall temperature, which in turn depends on exhaust gas temperatures. With increase of injector opening pressure, exhaust gas temperatures decreased and hence volumetric efficiency increased.

Preheating of the crude tyre oil marginally decreased volumetric efficiency in conventional engine, when compared with the normal temperature of crude tyre oil, because of reduction of bulk modulus, density of the fuel and increase of exhaust gas temperatures.

Table.6: Data of Volumetric efficiency at full load operation

Injection Timing (° bTDC)	Test Fuel	Volumetric Efficiency (%) at peak load operation											
		Conventional Engine (CE)						Engine with LHR-1 combustion chamber					
		Injector opening pressure (Bar)						Injector opening pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	85		86		87		80		81		82	
	CTO	81	80	82	81	83	82	77	78	78	79	79	80

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

Coolant load increased with BMEP for test fuels with both versions of the combustion chamber as noticed from Fig.5. This was due to increase of gas temperatures. Cooling load was higher with tyre operation with conventional engine. This was due to un-burnt fuel concentration at combustion chamber walls. Coolant load decreased with engine with LHR-1 combustion chamber with tyre oil operation. This was due to not only insulation provided with LHR-1 combustion chamber, but also due to improved combustion with the provision of insulation. This was also because of improved air fuel ratio with which gas temperatures decreased.

It is observed from Table.7, coolant load increased marginally in the conventional engine while it decreased in the engine with LHR-1 combustion chamber with increasing of the injector opening pressure with tyre oil. This was due to the fact with increase of injector opening pressure with conventional engine, increased nominal fuel spray velocity resulting in better fuel-air mixing with which gas temperatures increased. The reduction of coolant load in the LHR engine was not only due to the provision of the insulation but also it was due to better fuel spray characteristics and increase of air-fuel ratios causing decrease of gas temperatures and hence the coolant load.

Coolant load decreased marginally with preheating of tyre. This was due to improved air fuel ratios with improved spray characteristics leading to reduction of gas temperatures. .

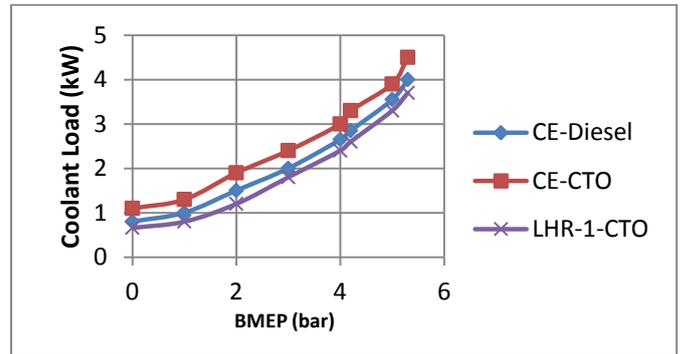


Figure 5: Variation of coolant load with brake mean effective pressure (BMEP) with tyre oil operation in conventional engine and engine with LHR-1 combustion chamber at an injection timing of 27° bTDC and injector opening pressure of 190 bar.

Table 7: Data of coolant load at peak load operation

Injection Timing (° bTDC)	Test Fuel	Data of Coolant Load (kW) at peak load operation.											
		Conventional Engine (CE)						Engine with LHR-1 combustion chamber					
		Injector opening pressure (Bar)						Injector opening pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	4.0	---	3.8	--	3.6	---	3.8	---	3.6	--	3.4	---
	CTO	4.5	4.3	4.2	4.0	4.0	3.8	3.7	3.5	3.5	3.3	3.3	3.1

This indicates at recommended injection timing, sound intensities marginally increased in CE with tyre oil operation in comparison with CE with pure diesel operation as noticed from Fig.6. Higher viscosity, bulk modulus, duration of combustion and poor volatility caused moderate combustion of tyre oil leading to generate higher sound levels. The engine with LHR-1 combustion chamber decreased sound intensity when compared with pure diesel operation on CE. This was because of hot environment in engine with LHR-1 combustion chamber improved the combustion of tyre oil. This was also due to decrease of density and bulk modulus of fuel at higher temperatures leading to produce lower levels of sound with LHR engine.

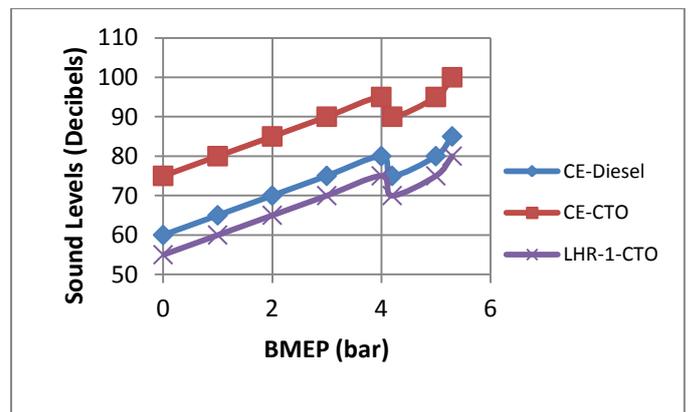


Figure 6: Variation of sound levels with brake mean effective pressure (BMEP) with tyre oil operation in conventional engine and engine with LHR-1 combustion chamber at an injection timing of 27° bTDC and injector opening pressure of 190 bar.

It is observed that sound intensity marginally decreased with increase of injector opening pressure for both versions of the engine with the tyre oil as noticed from Table.8. This was because of improved combustion with increased air fuel ratios. This was also due to simultaneous increase of bulk

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

modulus and density. This was due to improved spray characteristic of the fuel, with which there was no impingement of the fuel on the walls of the combustion chamber leading to produce efficient combustion. Sound intensities were lower at preheated condition of tyre oil, when compared with their normal condition. This was due to improved spray characteristics, decrease of density and reduction of bulk modulus of the fuel.

Table.8: Data of sound intensity at full load operation

Injection Timing (° bTDC)	Test Fuel	Data of Sound Intensity (decibels) at peak load operation											
		Conventional Engine (CE)						Engine with LHR-1 combustion chamber					
		Injector opening pressure (Bar)						Injector opening pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	Diesel	85	--	80	--	75	--	85	--	80	--	75	--
	CTO	100	95	95	90	90	85	80	75	75	70	70	65

3.2 Pollution Levels

Curves in Fig.7 indicate that drastic increase of smoke levels at all loads with CE fuelled with tyre oil was observed when compared with pure diesel operation on CE. This was due to the higher value of ratio of C/H tyre oil, when compared with pure diesel. The increase of smoke levels was also due to decrease of air-fuel ratios and volumetric efficiency. Smoke levels were related to the density of the fuel. Smoke levels were higher with tyre oil due to its high density.

However, smoke levels were comparable with engine with LHR-1 combustion chamber with tyre oil operation, due to efficient combustion and less amount of fuel accumulation on the hot combustion chamber walls of the LHR engine at different operating conditions of tyre oil.

Data from Table.9 shows that smoke levels decreased with increase of injection timing in both versions of the combustion chamber, with different operating conditions of the tyre oil. This was due to improvement in the fuel spray characteristics with higher injector opening pressures, causing lower smoke levels. Preheating of the tyre oil decreased smoke levels in both versions of the engine, when compared with normal temperature of tyre oil. This was due to i) the reduction of density of the tyre oil, as density was directly related to smoke levels, ii) the reduction of the diffusion combustion proportion in conventional engine with the preheated tyre oil, iii) reduction of the viscosity of the tyre oil, with which the fuel spray does not impinge on the combustion chamber walls of lower temperatures rather than it was directed into the combustion chamber.

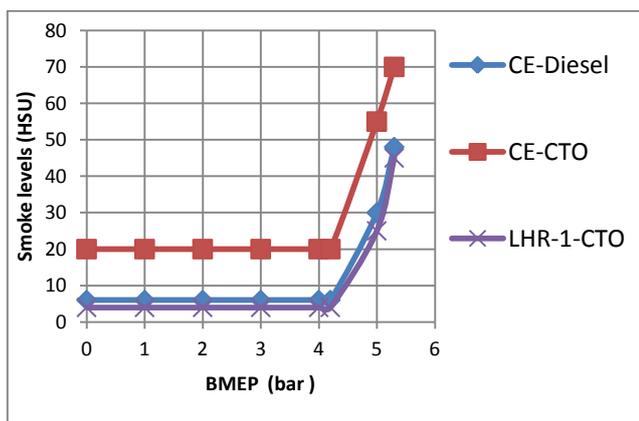


Figure 7: Variation of smoke levels in Hartridge Smoke Unit (HSU) with brake mean effective pressure (BMEP) with tyre oil operation in conventional engine and engine with LHR-1 combustion chamber at an injection timing of 27° bTDC and injector opening pressure of 190 bar.

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

Table.9: Data of Smoke levels at full load operation

Injection timing (° bTDC)	Test Fuel	Smoke levels (Hartridge Smoke Unit, HSU) at full load operation											
		CE						LHR-1 combustion chamber					
		Injector opening pressure (Bar)						Injector opening pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	Diesel fuel	48	--	38	--	34	--	50	--	45	--	40	--
	CTO	70	65	65	60	60	55	45	40	40	35	35	30

4. SUMMARY

Engine with ceramic coated combustion chamber with tyre oil at normal temperature increased peak BTE by 15%, at full load operation-decreased brake specific energy consumption by 9%, exhaust gas temperature decreased by 13%, decreased volumetric efficiency by 5%, decreased coolant load by 18%, decreased sound levels by 20% and decreased smoke levels by 35% in comparison with conventional engine.

Conventional engine with tyre oil at normal temperature decreased peak BTE by 3%, at full load operation-increased brake specific energy consumption by 7%, exhaust gas temperature increased by 2%, decreased volumetric efficiency by 5%, increased coolant load by 13%, increased sound levels by 18% and increased smoke levels by 46% in comparison with conventional engine with pure diesel operation.

Performance parameters and pollution levels improved with an increase of injector opening pressure with engine with both versions of the combustion chamber.

With preheating of tyre oil- Peak brake thermal efficiency increased, at full load operation- brake specific energy consumption decreased, exhaust gas temperature increased, volumetric efficiency decreased, coolant load decreased, sound levels decreased and smoke levels decreased when compared with normal temperature of the tyre oil.

4.1 Research Findings

Comparative studies on performance parameters and pollution levels with direct injection diesel engine with ceramic coated combustion chamber and engine with conventional combustion chamber were made at varied injector opening pressure with different operating conditions of tyre oil. Experimental results were compared with pure diesel operation at similar operating conditions.

4.2 Future Scope of Work

Hence further work on the effect of injection timing on performance parameters, exhaust emissions and combustion characteristics with ceramic coated LHR combustion chamber with tyre oil operation is necessary.

ACKNOWLEDGMENTS

Authors thank authorities of Chaitanya Bharathi Institute of Technology, Hyderabad for providing facilities for carrying out research work. Financial assistance provided

by All India Council for Technical Education (AICTE), New Delhi is greatly acknowledged.

REFERENCES

- [1] Matthias Lamping, Thomas Körfer, Thorsten Schnorbus, Stefan Pischinger, Yunji Chen (2008). *Tomorrows diesel fuel diversity – challenges and solutions*, SAE 2008-01-1731.
- [2] Cummins, C. Lyle, Jr. (1993). *Diesel's Engine, Volume 1: From conception to 1918*. Wilsonville, OR, USA: Carnot Press, ISBN 978-0-917308-03-1.
- [3] Venkateswara Rao, N., Murali Krishna, M.V.S. and Murthy, P.V.K. (2013). comparative studies on exhaust emissions and combustion characteristics of tobacco seed oil in crude form and biodiesel form in direct injection diesel engine. *International Journal of Mechanical and Production Engineering Research and Development*, 3(4), 125-138.
- [4] Venkateswara Rao, N., Murali Krishna, M.V.S. and Murthy, P.V.K. (2013). Comparative studies on performance of tobacco seed oil in crude form and biodiesel form in direct injection diesel engine *International Journal of Automobile Engineering Research & Development*, 3(4), 57-72
- [5] Srikanth, D., Murali Krishna, M.V.S., Ushasri, P. and Krishna Murthy, P.V. (2013). Performance evaluation of a diesel engine fuelled with cotton seed oil in crude form and biodiesel form. *International Journal of Academic Research for Multidisciplinary* 1(9), 329-349.
- [6] Senthil Kumar, M., Kerihuel, A., Bellettre, J. and Tazerout, M. (2005). Experimental investigations on the use of preheated animal fat as fuel in a compression ignition engine. *Renewable Energy*, 30, 2314-2323.
- [7] Agarwal, D., Agarwal, A.K. (2007). Performance and emissions characteristics of jatropha oil (preheated and blends) in a direct injection compression ignition engine. *Int. J. Applied Thermal Engineering*, 27, 2314-23.
- [8] Canaker, M., Ozsezen, A.N. and Turkcan, A. (2009). Combustion analysis of preheated crude sunflower oil in an IDI diesel engine. *Biomass & Bio-energy*, 33, 760-770.
- [9] Hanbey Hazar and Huseyin Aydin. (2010). Performance and emission evaluation of a CI engine fueled with preheated raw rapeseed oil (RRO)-diesel blends. *Applied Energy*, 87, 786-790.

INTERNATIONAL JOURNAL FOR ADVANCE RESEARCH IN ENGINEERING AND TECHNOLOGY

WINGS TO YOUR THOUGHTS.....

- [10] Murugan, S., Ramaswamy, M.C., Nagarajan, G. (2008). The use of tyre pyrolysis oil in diesel engines. *Waste Management*, 28(12):2743–49.
- [11] Murugan, S., Ramaswamy, M.C. and Nagarajan, G. (2008). A comparative study on the performance, emission and combustion studies of a DI diesel engine using distilled tyre pyrolysis oil–diesel blends. *Fuel*, 87, 10–11, 2111–2121
- [12] Sk. Mohammad Younus, Ranjith Kumar, Hanumantha Rao, Y.V. (2013). Performance and emissions characteristics of diesel engine fueled with tyre pyrolysis oil & diesel blends with additives. *International Journal of Engineering Science Invention* 2(5), 2319 – 6726
- [13] Parlak, A., Yasar, H., Idogan O. (2005). The effect of thermal barrier coating on a turbocharged Diesel engine performance and exergy potential of the exhaust gas. *Energy Conversion and Management*, 46(3), 489–499.
- [14] Ekrem, B., Tahsin, E., Muhammet, C. (2006). Effects of thermal barrier coating on gas emissions and performance of a LHR engine with different injection timings and valve adjustments. *Journal of Energy Conversion and Management*, 47, 1298–1310.
- [15] Ciniviz, M., Hasimoglu, C., Sahin, F., Salman, M. S. (2008). Impact of thermal barrier coating application on the performance and emissions of a turbocharged diesel engine. *Proceedings of The Institution of Mechanical Engineers Part D-Journal Of Automobile Engineering*, 222 (D12), 2447–2455.